FRESH PRICE

User Manual

Daily fruit & vegetable prices and cost calculation

For everyday users and administrators · Phone, tablet and computer

Who this guide is for

Everyday users

Sign in, create calculations, check prices, find past work.

Parts A and B

Administrators

Enter daily prices, manage items and units, users, reports and audit.

Parts A, B and C

Version 1.0 · September 2026 · Part D is a quick reference for everyone.

CONTENTS

What’s inside

Getting started . . . 3

What Fresh Price does . . . 3

Two kinds of users . . . 3

Create your account and sign in . . . 4

Install the app on your phone . . . 4

Finding your way around . . . 5

Everyday use . . . 6

The Home screen . . . 6

Create a calculation, step by step . . . 6

Units and conversions . . . 7

When a price is missing . . . 8

Duplicates, removing lines, adjustments and notes . . . 8

Save draft or Finalize . . . 9

Your calculation history . . . 9

Viewing prices . . . 10

Administration . . . 11

Enter daily prices . . . 11

Master data: items, categories and units . . . 12

Settings . . . 14

Users & roles . . . 14

Reports & exports . . . 14

Cancel a finalized calculation . . . 15

Audit log . . . 15

Quick reference . . . 16

Messages and what to do . . . 16

Daily routine for administrators . . . 17

Frequently asked questions . . . 17

Glossary . . . 18

PART A · EVERYONE

Getting started

What Fresh Price does, the two kinds of users, and how to sign in, install the app and find your way around.

What Fresh Price does

Fresh Price keeps a **daily price list** for fruits and vegetables and turns quantities into money. You pick items, type how much, and the app fills in today's rate and adds everything up. Every saved calculation keeps the exact rate it used, so it never changes later, even when prices do.

You enter	The app does
Potato · 500 g	Finds today's rate (₹30/kg), converts 500 g to 0.5 kg, amount = **₹15.00**
Chilli · 10 kg	Rate ₹80/kg → **₹800.00**
Cucumber · 10 kg	Rate ₹40/kg → **₹400.00**
	Total **₹1,215.00**, saved with its rates and a reference number such as CAL-000123

> **Note.** If Potato becomes ₹35/kg tomorrow, tomorrow's calculations use ₹35, while today's saved calculation keeps showing ₹30. That is by design.

Two kinds of users

	Everyday user	Administrator
Create calculations, save drafts, finalize	Yes, their own	Yes
See calculations	Only their own	Everyone's
View daily prices and price history	Yes	Yes
Enter and change daily prices	No	Yes
Cancel a finalized calculation	No	Yes, with a reason
Items, categories, units, custom fields, settings	No	Yes
Users & roles, reports & exports, audit log	No	Yes

- The **first person to create an account becomes the Administrator**. Everyone who signs up after that starts as an everyday user.
- An administrator can promote others to Administrator under **More** → **Users & roles** (Part C).

Create your account and sign in

Create an account

1. Open the Fresh Price address your administrator gave you.
2. Tap **New here? Create an account**.
3. Enter your name, email and a password of at least 8 characters, then tap **Create account**.
4. Open the confirmation email. For the smoothest result, **copy the link and paste it into the same browser** where you created the account, rather than clicking it inside your email app.
5. Sign in with your email and password.

Sign in

1. Enter your email and password.
2. Tap **Sign in**. You land on the Home screen.

> Tip. "Your email is not confirmed yet" means the confirmation link has not been opened. Tap **Resend confirmation email** on the sign-in page.

Forgot your password

1. On the sign-in page, type your email and tap **Forgot password?**
2. Open the reset email and paste the link into the **same browser** you used to request it.
3. Choose a new password on the **Set a new password** screen and tap **Save password**.

- Each reset link works **once**. If you see "That email link could not be used", request a new one.
- To change your password while signed in: **More** → **Change password**.
- To sign out: **More** → **Sign out**.

Install the app on your phone

Fresh Price runs in the browser, but you can install it so it opens full-screen from your home screen like a normal app.


Phone	How to install
Android (Chrome)	Open Fresh Price → tap the ⋮ menu → **Install app** or **Add to Home screen**.
iPhone (Safari)	Open Fresh Price → tap the Share button → **Add to Home Screen**.
Computer (Chrome / Edge)	Click the install icon at the right end of the address bar.

> Note. Fresh Price needs an internet connection to load prices and save calculations, so the figures you see are always current. Without a connection you see a "You're offline" page with a **Try again** button.


Finding your way around

On a phone, five tabs sit at the bottom of the screen. On a tablet or computer the same links appear in a left-hand menu. The date at the top right is the **business date** (India time), which the app uses for “today”.

Tab	What it’s for
Home	Today’s total, counts, price status, recent calculations and quick actions.
Calculate	Create a new calculation (the main screen).
Prices	Today’s price list. Administrators enter prices here, everyone else can view them.
History	All your calculations. Search by date, status or item.
More	Your account (change password, sign out) and, for administrators, all admin screens.

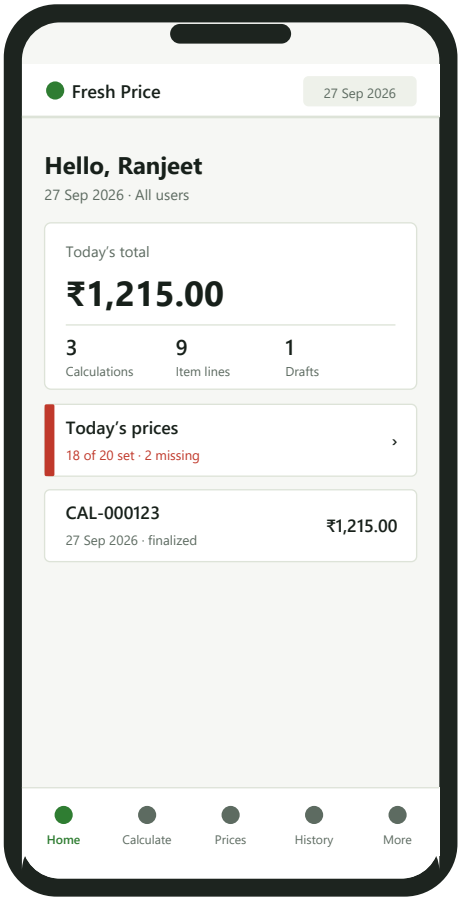

Home: today at a glance

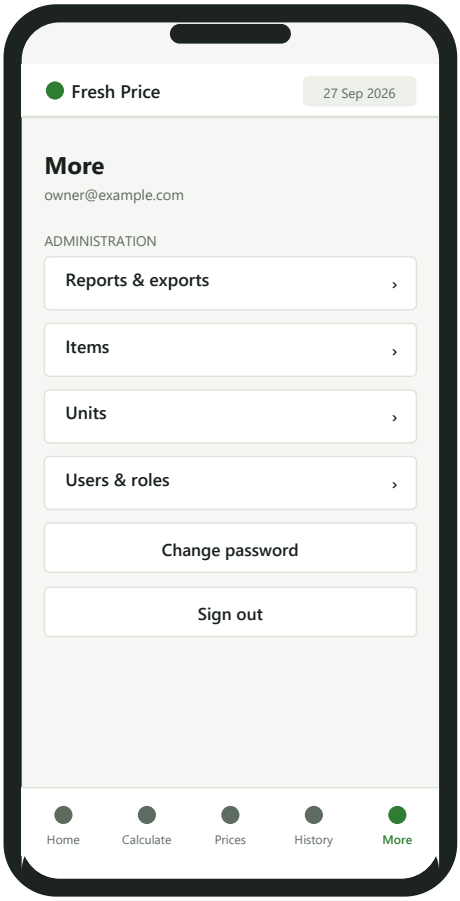

More: account and admin screens

PART B · EVERYONE

Everyday use

Create calculations quickly on your phone, save them as drafts or finalize them, and find past work.


The Home screen

- **Today's total**: the sum of today's *finalized* calculations. Drafts are not counted until finalized.
- **Calculations · Item lines · Drafts**: today's counts. Tap **Drafts** to open your history.
- **Today's prices**: how many items have a price for today, and how many are missing.
- **Finalized totals**: yesterday, the last 7 days and this month.
- **Recent calculations**: your latest five. Tap one to open it.


> Note. Everyday users see figures for **their own** calculations. Administrators see figures for everyone.

Create a calculation, step by step

1. Tap the **Calculate** tab. The date is set to today. Use ‹ › or tap the date to change it; rates always come from the chosen date.
2. Tap **Add your first item** (or **+ Add item**). A panel slides up with a search box, category chips and each item's rate for that date.
3. Type a few letters (for example *pot*) and tap the item, or press Enter to pick the first match.
4. The keypad opens on the new line. Type the **quantity**, for example 500.
5. Tap the **unit**, for example **g**. Only units that convert to the item's price unit are offered, such as kg and g for potatoes.
6. The line shows the rate (*@ ₹30.00/kg*), the conversion (*= 0.5 kg*) and the **amount**. The **total** at the bottom updates as you type.
7. Press **Enter** to jump to the next line. On the last line, Enter opens **Add item** again.
8. When you're done, tap **Save draft** or **Finalize** (see below).

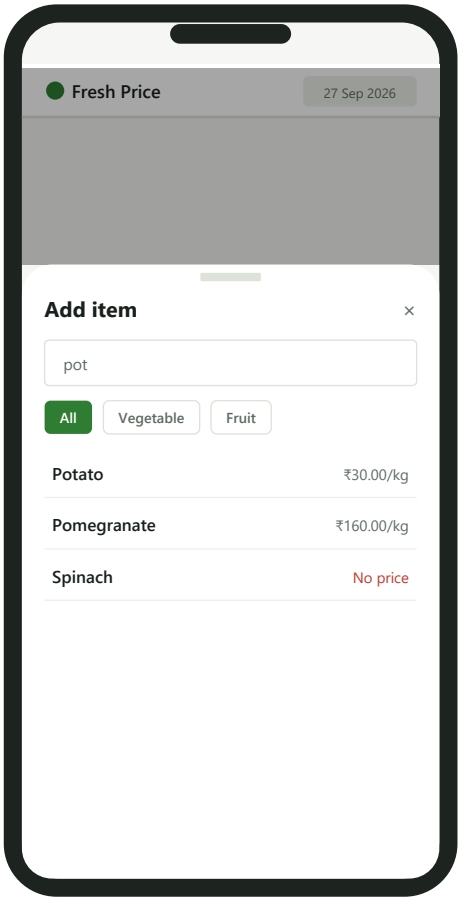

Pick items from the slide-up panel

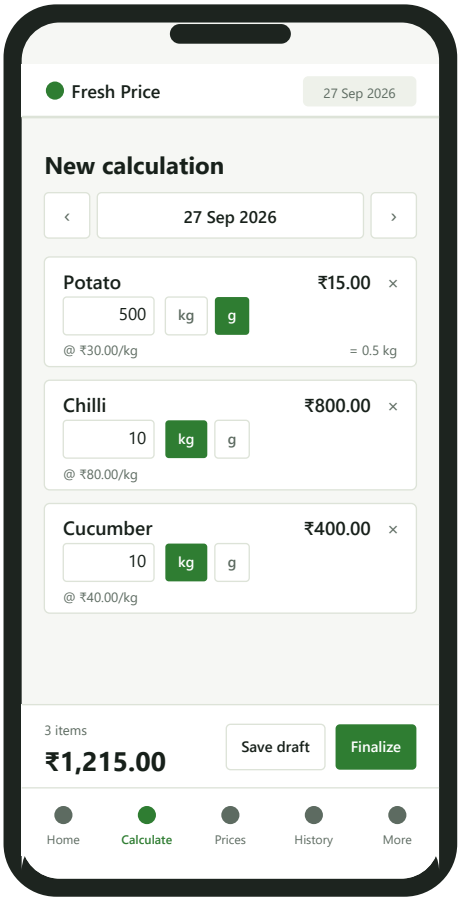

Quantities, units and the running total

Units and conversions

Prices are set per a **price unit** (for example ₹/kg). You may enter any unit that converts to it, and the app converts before multiplying. Amounts are rounded once, to 2 decimals, at the end.


You enter	Price	Conversion	Amount
500 g Potato	₹30/kg	500 g = 0.5 kg	0.5 × 30 = **₹15.00**
2 kg Onion	₹35.50/kg	none needed	**₹71.00**
3 pc Banana	₹60/dozen	3 pc = 0.25 dozen	**₹15.00**
2 box Mango	₹100/kg	1 box = 5 kg (item conversion)	10 × 100 = **₹1,000.00**

Note. A unit that can't be converted, such as millilitres for an item priced per kg, is never offered, and the app will not calculate it. Ask your administrator to add an **item conversion** if an item is legitimately sold another way (for example by the box).

When a price is missing

If an item has no price for the chosen date, its line turns red with *"Price not available for Potato on 27 Sep 2026."* The app **never assumes zero** and never quietly uses an old price.

- **Everyday users**: the line says *Ask an admin to add this price*. You can still save other work as a draft later.
- **Administrators**: tap **Add today's price** to type it, or **Use previous: ₹28.00 (26 Sep)** to pre-fill the last known price, then tap **Save price**. The line fills in at once.

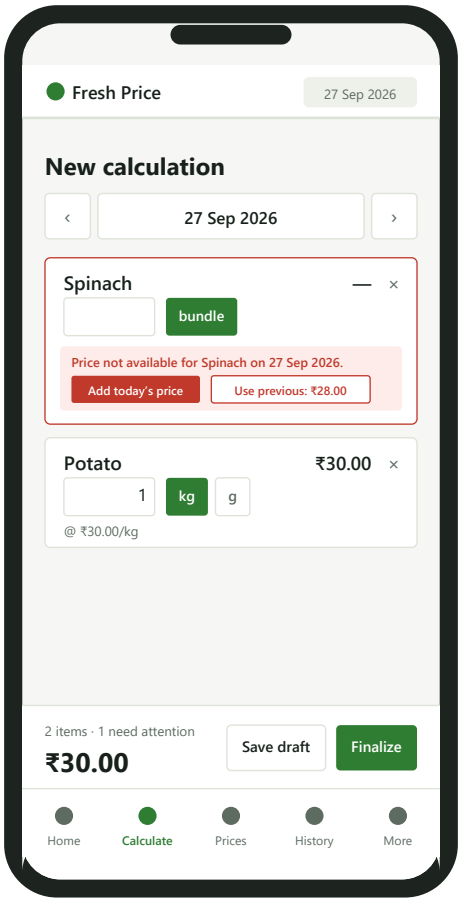

A missing price is flagged, never zero

Duplicates, removing lines, adjustments and notes

- **Adding an item that is already in the list** takes you to its existing line with the message *"Potato is already in the list — update its quantity."* This prevents accidental double entries.
- **Remove a line** with the **×** at its top right.
- **+ Adjustment or notes**: an adjustment is added to the subtotal. Use a negative number for a discount (for example **-50**). Notes are free text (up to 500 characters) saved with the calculation.

Save draft or Finalize

	Save draft	Finalize
Use it when	You're not finished, or want to check later	The calculation is correct and complete
Can be edited	Yes, by you	**No, never**. It is frozen
Counts in totals and reports	No	Yes
Can be deleted	Yes, by you	No. An administrator can **cancel** it with a reason

- After saving you land on the calculation's page, which shows its reference number (for example **CAL-000124**).
- Tapping Save twice by accident still creates **only one** calculation.
- The server re-checks every rate when you save. If an administrator changed a price a moment ago you'll see *"The price of Potato just changed. Review the new rate and save again."* The new rates load automatically. Check them and save again.

Your calculation history

1. Tap the **History** tab.
2. Filter by status (**All · Drafts · Finalized · Cancelled**), a **From / To** date range, or **Contains item**.
3. Tap a calculation to open it.

What you can do on a calculation's page

Status	What it means	Actions
Draft	Saved but not final. Not counted in totals.	**Edit**, **Finalize**, **Delete draft** (your own drafts only)
Finalized	Final and frozen, with its rates kept exactly as used.	**Print**. Administrators: **Cancel calculation**
Cancelled	Withdrawn by an administrator, with the reason shown. Kept for audit.	View only

> Tip. **Finalize can refuse a draft** if a rate changed after the draft was saved: *"The price of Onion changed since this draft was saved. Open the draft and save it again."* Tap **Edit**, check the new rate and save. Then finalize.

Print

Open a finalized calculation and tap **Print**. The printout shows only the calculation (items, quantities, rates, amounts and totals) without the app's menus. Choose **Save as PDF** in the print dialog to keep a file.

Viewing prices

Everyone can open the **Prices** tab to see each item's rate for any date, the previous rate, and whether it went up (▲) or down (▼). Only administrators can change prices. Tap **History** → to browse past prices.

PART C · ADMINISTRATORS


Administration

Daily prices, master data, settings, users, reports, the audit log and cancelling calculations. Admin screens are under the **More** tab.


Enter daily prices

Every morning (or whenever rates change), set the day's price for each item. Prices are stored **per date**: setting today's price never changes yesterday's, and past calculations keep the rates they used.

1. Open the **Prices** tab. Check the date (‹ › to change it; **Today** jumps back).
2. The summary shows e.g. *18 of 20 items priced · 2 missing*. Use **Missing** to see only unpriced items.
3. Tap a price box and type the rate. Press **Enter** to move to the next item.
4. Each row shows the previous price and date, and ▲/▼ with the difference once you type.
5. Tap **Save prices** in the bar at the bottom. It shows how many changes you have.

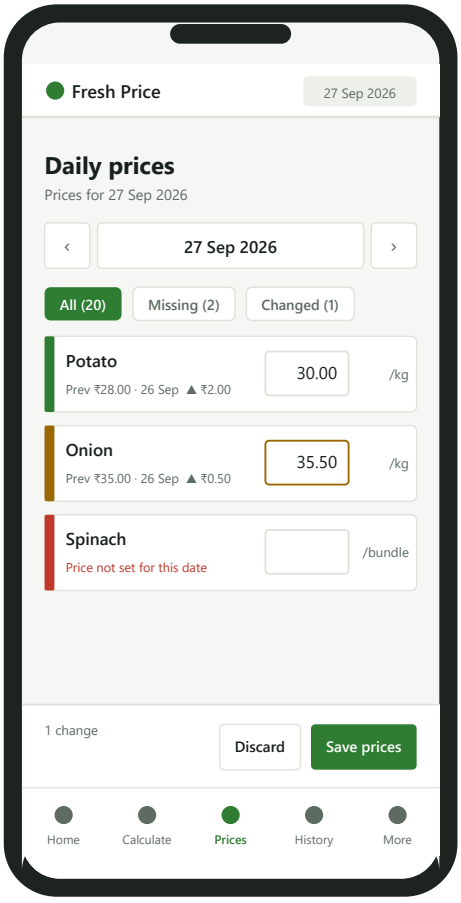

Colour strip: green saved · amber unsaved · red missing

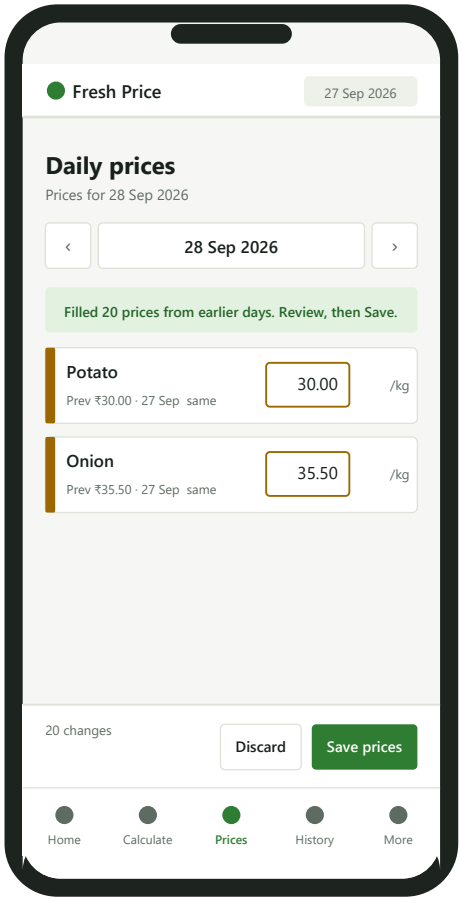

Copy previous prices, review, save

Copy previous prices

Tap **Copy previous prices** to fill every *empty* price with that item's most recent earlier price. Nothing is saved until you review the values and tap **Save prices**. Items that already have a price for the date are not touched, and the earlier day is never changed.

How saving works

- **All or nothing**: if any price is invalid, nothing is saved and the problem rows are highlighted (*"Nothing saved — fix 1 highlighted price."*). Fix them and save again.
- Valid formats are **30** or **30.50** (up to 2 decimals). Zero is allowed. Negative values are not.
- If another admin saved the same price after you opened the screen, you'll see *"Changed by someone else… Reload and try again."* Your version never silently overwrites theirs.
- Every edit of a saved price is kept as a revision. Prices can't be deleted: clearing a saved box restores it, so enter the correct value instead.
- Leaving the page with unsaved changes asks for confirmation.

Price history

Prices → **History** → lists every stored price, newest first. Filter by item, category and date range. The **Edits** column shows how many times a day's price was corrected. Details of each correction are in the audit log.

Master data: items, categories and units

Everything the app knows about (items, categories, units, conversions and custom fields) is **master data** that you manage yourself, with no programming. All master screens work the same way:

- Open **More** → **Administration** and choose the list.
- Search, and filter by **All / Active / Inactive**. Phones show cards; computers show a table.
- Tap **+** (bottom right on phones) or **+ New** to add. Tap a row to edit.
- The form checks your input as you go and shows problems under each field.
- **Deactivate instead of delete** when something has history: untick **Active**. Inactive entries disappear from pick-lists but old records stay intact. Deleting something that is in use is refused with a message.
- If two admins edit the same record, the second save shows *"Someone else changed this record. Reload it and try again."*

Categories

Name, optional **parent** (e.g. *Leafy Vegetable* under *Vegetable*), sort order and Active. Filtering by a parent category also shows its sub-categories.

Unit types and units

Units belong to a **type** (Weight, Volume, Count, Pack). Within a type, one **base unit** has factor 1 and other units state how many base units they are. Units only convert within the same type.

Unit	Type	Base unit	Factor	Meaning
kg	Weight	(base)	1	Base for weight
g	Weight	kg	0.001	1 g = 0.001 kg

Unit	Type	Base unit	Factor	Meaning
L	Volume	(base)	1	Base for volume
ml	Volume	L	0.001	1 ml = 0.001 L
pc	Count	(base)	1	Base for pieces
dozen	Count	pc	12	1 dozen = 12 pc
box, pkt, bundle	Pack	(base each)	1	Converted only via item conversions

- A base unit must have factor **1**, and a derived unit must share its base unit's type. The form enforces both.
- **Quantity decimals** is how precisely quantities in that unit are usually entered.

Items

Field	What to enter
Name	Unique name, e.g. *Lady Finger*.
Category	Where it appears in filters and reports.
Pricing unit	The unit daily prices are entered in (₹ per **kg**, per **dozen**, per **bundle**…).
Default entry unit	The unit pre-selected when adding the item to a calculation. It must convert to the pricing unit (e.g. **g** for Chilli priced per kg).
Additional details	Any custom fields you've defined (see below), e.g. *Origin*.

> Note. Deleting an item **hides** it rather than erasing it. Past prices and calculations still show it by name. Renaming an item is safe too: saved calculations keep the name they were saved with.

Item conversions

Some items are sold in a pack whose weight is fixed for that item only, for example "1 box of Mango = 5 kg". Add it under **More → Item conversions**: Item *Mango*, From *box*, To *kg*, Factor *5*. From then on, **box** appears as a unit choice for Mango in calculations (and g works too, via kg).

Custom fields

Add your own fields to items without any programming, under **More → Custom fields**. An example field, *Origin*, is already included.

Setting	Meaning
Applies to / Label / Key	Which records get the field, the label users see, and a short key (lowercase, e.g. *grade*).
Type	text, number, decimal, yes/no, date, select (a list of choices) or lookup (pick a category, unit or item).
Choices	For *select*: one choice per line.
Required · Min · Max · Pattern	Validation rules, checked on every save.

Setting	Meaning
Show in form / list / mobile card	Where the field is displayed. Order fields with *Form order* and *List order*.

Settings

More → **Settings** holds business rules used everywhere. Change a value, then tap **Save** in the bar at the bottom. Each setting is checked and reported separately, so an invalid value doesn't block the others.

Setting	Default	Effect
Business timezone	Asia/Kolkata	Defines "today" for prices and calculations.
Currency code / symbol / locale	INR · ₹ · en-IN	How money is shown, e.g. ₹1,23,000.00.
Amount decimals	2	Decimals kept for amounts (0–4).
Rounding mode	HALF_UP	How each line amount is rounded (once). HALF_EVEN, DOWN and UP are also available.
Duplicate item lines	merge	*merge*: adding an item already in the list jumps to it. *allow*: separate lines.
Reference prefix / digits	CAL- · 6	Calculation numbers such as CAL-000123.
Allow copying previous price	Yes	Shows Copy previous / Use previous buttons.

Users & roles

1. Ask the new person to create an account on the sign-in page. They start as an everyday **User**.
2. Open **More** → **Users & roles** and tap their name.
3. Tick **Admin** and/or **User**, or untick **Active** to block them, then tap **Save**.

- A deactivated person can still sign in but can't see or change anything.
- You can't deactivate your own account, and the app always keeps **at least one active admin**.
- Removing your own Admin role takes effect immediately and removes your access to admin screens.

Reports & exports

More → **Reports & exports**. Choose a report and a period (**Today, Yesterday, Last 7 days, This month** or **Custom**, up to one year).

Report	Shows	Typical use
Items	Per item: total quantity (in its price unit), average rate, amount, number of calculations; grand total.	Pick **Today** for the **daily report**; a range for **item consumption**.
Daily totals	One row per day: calculations, item lines, total. Days with nothing show zero.	Trends, month-end totals.

Report	Shows	Typical use
Prices	Every stored price in the range with edit counts (export only). Optionally one item.	Price history report.

- **CSV** and **Excel** download files that open in Excel, Google Sheets or LibreOffice with numbers formatted properly. **Print** prints the on-screen report.
- Reports count **finalized** calculations only. Drafts and cancelled ones are excluded.
- Figures use the amounts **saved** in each calculation, so later price changes or renamed items never alter a past report.

Cancel a finalized calculation

1. Open the calculation (History tab) and tap **Cancel calculation**.
2. Type the reason (at least 3 characters), for example *Entered twice*, and confirm.

The calculation stays in history marked **Cancelled** with the reason, and drops out of all totals and reports. Cancelling can’t be undone. Create a new calculation if needed.

Audit log

More → **Audit log** records every change to prices, calculations, items, units, categories, custom fields and settings: **what** changed, **who** changed it and **when**. Filter by type and tap an entry to see the old value (struck through) and the new value. Green = created, amber = changed, red = deleted.

PART D · EVERYONE

Quick reference

Messages you may see and what to do, a daily routine for administrators, answers to common questions and key terms.

Messages and what to do

Message	What it means / what to do
Email or password is incorrect.	Check both, including capital letters. Use **Forgot password?** if needed.
Your email is not confirmed yet.	Open the confirmation email, or tap **Resend confirmation email**.
That email link could not be used.	Links work once and in the same browser. Request a new one and paste it into that browser.
Price not available for … on …	No price for that date. Admins: Add today's price / Use previous. Users: ask an admin.
… is already in the list — update its quantity.	The item is already on a line. Change that line's quantity.
The price of … just changed. Review the new rate and save again.	An admin changed a rate while you worked. New rates are loaded; check and save.
The price of … changed since this draft was saved.	Open the draft (**Edit**), save it again, then finalize.
Fix the highlighted lines first.	A quantity is empty or invalid, or a price is missing. Red lines explain why.
Nothing saved — fix N highlighted prices.	Price entry is all-or-nothing. Correct the red rows and save again.
Changed by someone else. Reload and try again.	Another admin saved first. Reload to see their value, then re-apply your change.
This … is in use. Deactivate it instead of deleting.	Untick **Active** instead. History stays intact.
At least one active admin is required.	Promote someone else to Admin before removing the last one.
Too many requests. Try again in N s.	A safety limit was reached. Wait the stated seconds.
Something went wrong. (Ref: req_…)	Try again. If it repeats, send the **Ref** code to your administrator or support.
You're offline	Check your internet connection and tap **Try again**.

Daily routine for administrators

When	Do this
Morning	Prices → today → **Copy previous prices** → update what changed → **Save prices**.
Morning	Home → **Today's prices** should read "All prices set". Tap it if any are missing.
During the day	Staff create calculations. Watch **Drafts** on Home.
End of day	History → **Drafts** → finalize or delete leftovers.
End of day / month	Reports → **Items** (Today) or **Daily totals** (This month) → **Excel** or **Print**.
As needed	Add new items or units under More; review the **Audit log** for unexpected changes.

Frequently asked questions

I changed today's price. Do earlier calculations change?

No. Every calculation stores the rate it used. Only new calculations use the new price.

Why can't I edit a finalized calculation?

Finalized means final, which protects your records. An administrator can cancel it with a reason; then create a new one.

Why doesn't my total on Home include my draft?

Home and reports count finalized calculations only. Finalize the draft to include it.

Can I work offline?

No. Prices and calculations always come live from the server so figures are never out of date. The installed app shows an offline page until the connection returns.

Why can't I choose ml for Potato?

Potato is priced per kg. Only units that convert to kg are offered, so the app never multiplies incompatible units.

Someone new needs access. What do I do?

They create an account on the sign-in page; an administrator then sets their role under More → Users & roles.

How are amounts rounded?

Quantity × rate is calculated exactly and rounded once, to 2 decimals (half-up by default; set in Settings).

Glossary

Term	Meaning
Business date	“Today” in the business timezone (India time by default), independent of the device clock.
Price unit	The unit an item’s price is set in, e.g. ₹/kg. Entered quantities are converted to it.
Base unit / factor	The reference unit of a unit type (kg, L, pc) and how many base units another unit equals.
Item conversion	An item-specific rule such as 1 box of Mango = 5 kg.
Draft / Finalized / Cancelled	Editable work in progress / frozen final record / withdrawn record kept for audit.
Reference number	The calculation’s unique number, e.g. CAL-000123.
Snapshot	The item name, unit and rate saved inside a calculation, so it never changes later.
Master data	Items, categories, units, conversions, custom fields and settings that admins manage.
Audit log	The record of who changed what, and when.